



PCT/GB 2003 / 0 0 5 5 2 1
Rec'd PCT/PTO 20 JUN 2005



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Stephen Hordley


Dated

12 January 2004

BEST AVAILABLE COPY

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

SMC 60583/GB/P1

2. Patent application number

(The Patent Office will fill in this part)

08 MAY 2003

0310588.9

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Avecia Limited
Hexagon House
Blackley.
Manchester, M9 8ZS

Patents ADP number (if you know it)

07764137001

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

IMPROVEMENTS IN AND RELATING TO
ORGANIC SEMICONDUCTING MATERIALS

5. Name of your agent (if you have one)

PARLETT, Peter Michael

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Avecia Limited
Hexagon House
Blackley
Manchester, M9 8ZS
United Kingdom

Patents ADP number (if you know it)

7764137001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

APPENDIX 1-2870022 J0YAMS

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	19
Claim(s)	04
Abstract	01
Drawing(s)	03 + 3 <i>ll</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 01

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *A Shepherd* Date *6 May 2003*
Avecia Limited Authorised Signatory

12. Name and daytime telephone number of person to contact in the United Kingdom Mrs K M Pinder/Mrs G Shepherd 0161 721 1361/2

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

IMPROVEMENTS IN AND RELATING TO ORGANIC SEMICONDUCTING MATERIALS

The present invention relates to compositions for use as organic semiconducting (OSC) materials, to layers comprising the same e.g. for use in electronic devices, to methods for the production thereof, to uses thereof and to devices or apparatus comprising the compositions.

In recent years, there has been development of OSC materials in order to produce more versatile, lower cost electronic devices. OSC materials may comprise either small organic molecules or polymers. Such materials find application in a wide range of devices or apparatus, including in organic field effect transistors (OFETs), organic light emitting diodes (OLEDs), photodetectors, photovoltaic (PV) cells, and as organic photoconductors (OPCs) in electrophotographic devices, to name just a few.

In many applications for OSC materials there is a need for increased charge carrier mobility which can lead to faster and/or more efficient devices.

Objects of the present invention include providing OSC materials of improved mobility, as well as improved devices using the OSC materials. Other objects will be apparent from the description.

Surprisingly, the inventors have found that mixtures of organic semiconducting compounds having certain different molecular weights have charge carrier mobilities greater than either of the individual compounds. This is surprising because previously it has been thought that by mixing two different semiconducting compounds, which would each have a different HOMO level, it would inevitably lead to charge trapping on one of the compounds, thereby reducing the mobility (see Yokoyama and Yokoyama J. Appl. Phys. 67 (6) 1990; Pai et al, J. Phys. Chem. 88, p4714, 1984; Veres and Juhasz, Phil. Mag. B, Vol.75, No.3, pp.377-387, 1997).

According to a first aspect of the present invention there is provided a composition for use as a OSC material, the composition comprising:

- (i) at least one higher molecular weight organic semiconducting compound having a weight average molecular weight (M_w) of at least 3000, and
- (ii) at least one lower molecular weight organic semiconducting compound having a weight average molecular weight (M_w) of 1000 or less.

Preferably the M_w of the higher molecular weight semiconducting compound is at least 4000, more preferably at least 5000 and most preferably at least 7000. Preferably the M_w of the lower molecular weight semiconducting compound is at least 150.

Compositions which observe these molecular weight differences have been found to have increased charge carrier mobility compared to either of the higher or lower molecular weight compounds individually. In some cases, the mobility is found to double.

The higher and lower molecular weight semiconducting compounds are transporters of the same type of charge carrier as each other. That is, the compounds are either each so-called "p-type" compounds which can transport positively charged holes, or

each so-called "n-type" compounds which can transport negatively charged electrons, the resultant composition being either p-type or n-type respectively.

The higher and lower molecular weight compounds are both semiconducting compounds. Preferably at least one, more preferably both, of the higher and lower molecular weight semiconducting compounds have a charge carrier mobility, μ , of at least $10^{-5}\text{cm}^2/\text{V.s.}$, more preferably at least $10^{-4}\text{cm}^2/\text{V.s.}$ Preferably, at least the higher molecular weight semiconducting compound has a charge carrier mobility of at least $10^{-5}\text{cm}^2/\text{V.s.}$, more preferably at least $10^{-4}\text{cm}^2/\text{V.s.}$

Preferably, the higher and lower molecular weight semiconducting compounds are present in the composition in the relative proportions 10:90 – 90:10 parts by weight; more preferably 30:70 – 70:30 parts by weight; even more preferably 40:60 – 60:40 parts by weight; and most preferably about 50:50 parts by weight.

The lower molecular weight compound may comprise either an oligomer typically having a number of repeat units, n , in the range 2 – 15, or a non-oligomeric small molecule (i.e. a monomer, where $n = 1$). Where the lower molecular weight compound comprises an oligomer, preferably n is in the range 2 – 5. Further preferably, the lower molecular weight compound is either an oligomer wherein $n = 2$ or 3 (i.e. dimer or trimer respectively) or a non-oligomeric small molecule wherein $n = 1$ (i.e. a monomer). The term polymer will be used herein to define any compound comprising a number of repeating units. The term oligomer as aforementioned is additionally used herein to define polymers having a small number of repeating units (typically 15 or less).


Preferably, the higher molecular weight semiconducting compound comprises a polymer, more preferably a conjugated polymer. The polymer typically has a number of repeat units, n , which is 5 or higher, preferably 10 or higher, more preferably 15 or higher and most preferably 20 or higher. The polymer may be substantially linear, or may have a degree of chain branching or may contain crosslinking. The polymer may be either monodisperse or polydisperse.

The higher molecular weight semiconducting compound may, for example, have an M_w of up to 1.5×10^6 . The M_w may be higher still.

Preferably, the higher and lower molecular weight semiconducting compounds are of a similar chemical class. In a preferred embodiment, the higher molecular weight compound contains one or more chemical groups the same as or similar to groups contained in the lower molecular weight compound. For example, preferably the higher and lower molecular weight semiconducting compounds each contain one or more of the following groups in common: arylamine, fluorene and/or thiophene groups. More preferred among these groups is arylamine, even more preferred being triarylamine. Additionally or alternatively, the higher and lower molecular weight semiconducting compounds may contain the same or similar repeat units as each other.

Preferred classes of compounds for the lower molecular weight semiconducting compound are those containing arylamine, fluorene, and/or thiophene groups, more

preferably arylamine, still more preferably triarylamine. A particularly preferred class of compound for the lower molecular weight semiconducting compound are arylamine group containing compounds having Formula 1:




Formula 1


5

wherein Ar^1 , Ar^2 and Ar^3 , which may be the same or different, each represent, independently if in different repeat units, an aromatic group (mononuclear or polynuclear) optionally substituted by at least one optionally substituted C_{1-40} hydrocarbyl group and/or at least one other optional substituent and $n = 1$ to 4, preferably 1 to 3 and more preferably 1 or 2. In the context of Ar^1 , Ar^2 and Ar^3 , a mononuclear aromatic group has only one aromatic ring, for example phenyl or phenylene. A polynuclear aromatic group has two or more aromatic rings which may be fused (for example naphthyl or naphthylene), individually covalently linked (for example biphenyl) and/or a combination of both fused and individually linked aromatic rings. Preferably each Ar^1 , Ar^2 and Ar^3 is an aromatic group which is substantially conjugated over substantially the whole group.


Examples of compounds of Formula 1 are given below:

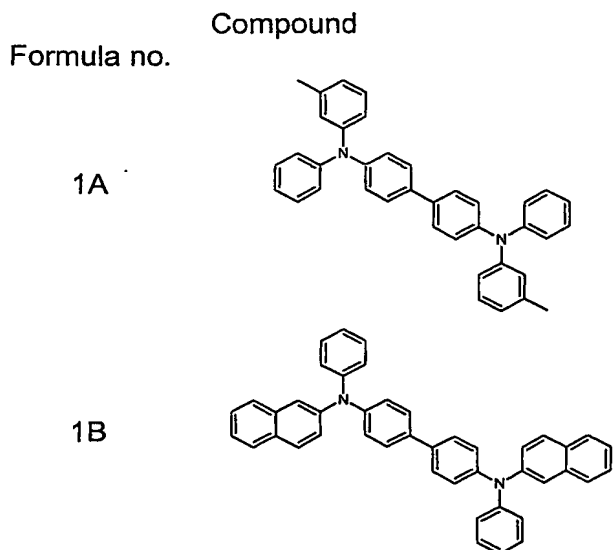


1C




1D




1E




1F

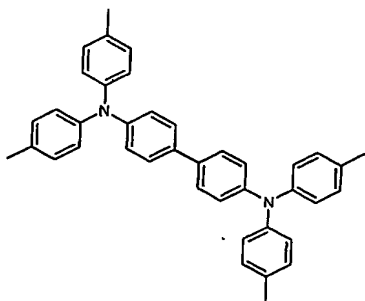


1G




1H




1I




1J

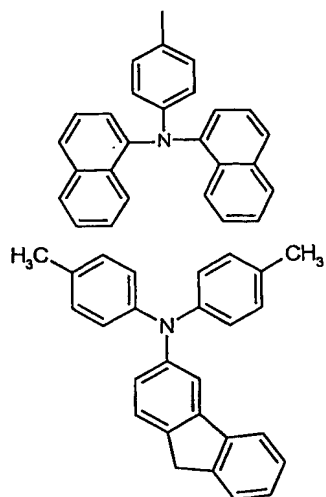

1K

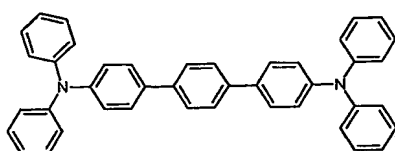


1L

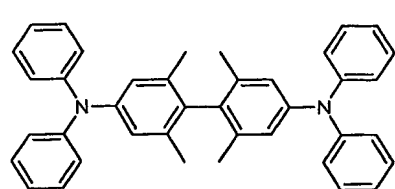


1M


1N



1O




Other suitable lower molecular weight semiconducting compounds may comprise monomers where $n=1$ or oligomers (including cooligomers) where $n=2-10$, preferably $n=2-3$, of the following structures of formulae 3 - 9:




Formula 3

where R_1 and R_2 may be independently H, alkyl, substituted alkyl, alkoxy, aryl or substituted aryl or other substituent and $*$ is any terminal or end capping group including hydrogen. The alkyl and aryl groups may be optionally fluorinated.




Formula 4

in which X may be Se, Te or preferably O, S or $-N(R)-$, where R represents H, alkyl, substituted alkyl, aryl, or substituted aryl; R_1 and R_2 are as for formula 3. The alkyl and aryl groups may be optionally fluorinated.

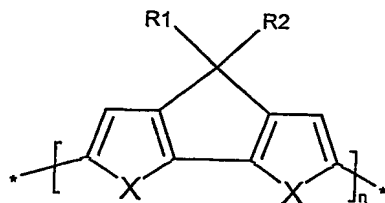


Formula 5

in which X, R_1 and R_2 are as for formula 4.

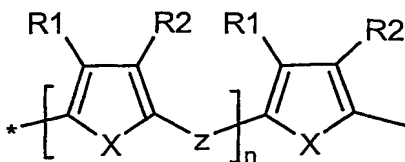


Formula 6

- 5 in which X is as for formula 4; R₁, R₂, may be independently H, optionally substituted alkyl, alkoxy, thioalkyl, acyl, aryl or substituted aryl, a fluorine atom, a cyano group, a nitro group or an optionally substituted secondary or tertiary alkylamine or arylamine - N(R₄)(R₅), where R₄ and R₅ may each be independently represented by H, alkyl, substituted alkyl, aryl, substituted aryl, alkoxy or polyalkoxy groups. The alkyl and aryl groups may be optionally fluorinated; and Z represents -C(T₁)=C(T₂)-, -C≡C-, -N(R')-, -N=N-, (R')=N-, -N=C(R')-, T₁ and T₂ independently represent -H, Cl, F, -C≡N or a lower alkyl, R' represents -H, alkyl, substituted alkyl, aryl, or substituted aryl. The alkyl and aryl groups may also be optionally fluorinated.




Formula 7

where R₁ and R₂ are as for formula 3. The alkyl and aryl groups may be optionally fluorinated.



Formula 8


where R₁-R₄ may be independently H, optionally substituted alkyl, alkoxy, aryl or substituted aryl. The alkyl and aryl groups may be optionally fluorinated.



Formula 9

where the monomer is an anilino monomer unit, the groups Ar', Ar'' and Ar''' being optionally substituted aryl groups in which the aryl groups may be phenyl groups and Ar''' may be substituted (e.g. o- or p-substituted) with a group which has an electron withdrawing or donating effect.


Preferred classes of compounds for the higher molecular weight semiconducting compound include those containing substantially conjugated repeat units. The higher molecular weight semiconducting compound may be a homopolymer or copolymer (including a block-copolymer) of the general formula 10:




where A, B,...,Z each represent a monomer unit and (c), (d),...(z) each represent the fraction of the respective monomer unit in the polymer, i.e. each (c), (d),...(z) is a value from 0 to 1 and the total of (c) + (d) +...+ (z) = 1. Examples of monomer units A, B,...,Z include units of formulae 3 - 9 given above. In the case of a block-copolymer, each monomer A, B,...,Z may be a conjugated oligomer or polymer comprising a number, for example 2 to 50, of the units of formulae 3-9. The higher molecular weight semiconducting compound preferably includes arylamine, fluorene, thiophene, spiro bifluorene and/or optionally substituted aryl (e.g. phenylene) groups, more preferably arylamine, still more preferably triarylamine. The aforementioned groups may be linked by further conjugating groups e.g. vinylene. Additionally preferably the higher molecular weight semiconducting compound comprises a polymer (either a homo-polymer or copolymer, including block-copolymer) containing one or more of the aforementioned arylamine, fluorene, thiophene and/or optionally substituted aryl groups. A preferred higher molecular weight compound comprises a homo-polymer or copolymer (including block-copolymer) containing arylamine (preferably triarylamine) and/or fluorene units. Another preferred higher molecular weight compound comprises a homo-polymer or co-polymer (including block-copolymer) containing fluorene and/or thiophene units.

A particularly preferred class of compound for the higher molecular weight semiconducting compound are arylamine group containing polymers having the same general Formula 1 as above except that n is at least 5, preferably at least 10, more preferably at least 15 and most preferably at least 20. Such compounds are denoted


herein as Formula 2. Examples of series of compounds of Formula 2 have formula 2A-C, where n is at least 15.



Formula 2A



Formula 2B



Formula 2C

Compounds of Formulae 1 and 2 may be prepared by various methods including those described in WO 99/32537 and WO 00/78843 the contents of which are hereby incorporated by reference.

Particularly preferred compositions, according to the present invention, contain at least one compound of Formula 1 (preferably where $n = 1$ or 2) as the lower molecular weight compound and at least one compound of Formula 2 (preferably where n is at least 20) as the higher molecular weight compound. More particularly preferred compositions are those wherein the compounds of Formulae 1 and 2 as aforementioned are provided in the relative proportions 40:60 – 60:40 parts by weight.

Advantageously, such compositions according to the present invention may exhibit improved carrier mobility, good solubility for solution coating techniques, compatibility with binders, and/or high durability.

The composition according to the invention may be prepared by a process which comprises mixing both the at least one higher molecular weight compound and the at least one lower molecular weight compound together in a solvent. The solvent may be one solvent or the higher and lower molecular weight compounds may each be dissolved in a separate solvent followed by mixing the two resultant solutions to mix the compounds. The solvent(s) containing the compounds may then be applied to a substrate. The solvent(s) may be evaporated to form the composition.

Preferably the composition according to the present invention and/or the individual higher and lower molecular weight compounds making up the composition may be deposited from a solvent. The solvent may be evaporated to form the composition. Preferably the composition and/or the individual higher and lower molecular weight compounds making up the composition are soluble in the solvent. Preferably the composition and the individual higher and lower molecular weight compounds making up the composition are soluble in a wide range of organic solvents, e.g. without limitation, toluene, THF, ethyl acetate, dichloromethane, chlorobenzene, anisole, xylene. Thus, the composition may be applied to a substrate as part of a device manufacture by various types of solution coating. The composition can be applied to a substrate by a variety of coating or printing techniques such as dip coating, roller coating, reverse roll coating, bar coating, spin coating, gravure coating, lithographic coating (including photolithographic processes), ink jet coating (including continuous and drop-on-demand, and fired by piezo or thermal processes), screen coating, spray coating and web coating. The composition may be deposited as a layer or film.

In one embodiment, the higher molecular weight compound may be deposited on a substrate first (e.g. by a form of solution coating), followed by depositing (e.g. by a form of solution coating the same as or different to the first) a coating of the lower molecular weight compound and allowing the lower molecular weight compound to diffuse into the higher molecular weight compound to form the composition, or vice versa.

The invention also provides the use of the composition in an electronic device. The composition may be used as a high mobility semiconducting material in various devices and apparatus. The composition may be used, for example, in the form of a semiconducting layer or film. Accordingly, in another aspect, the present invention provides a layer for use in an electronic device, the layer comprising the composition according to the first aspect of the invention. The layer or film may be less than about thirty microns. For various electronic device applications, the thickness may be less than about one micron thick. The layer may be deposited, e.g. on a part of an electronic device, by any of the aforementioned solution coating or printing techniques.

The composition may be used, e.g. as a layer or film, in a field effect transistor (FET) e.g. as the semiconducting channel, organic light emitting diode (OLED) e.g. as a hole or electron injection or transport layer or electroluminescent layer, photodetector, chemical detector, photovoltaic cell (PVs), capacitor and the like. The composition may

also be used in electrophotographic (EP) apparatus, e.g. in the organic photoconductor. The composition is preferably solution coated to form a layer or film in the aforementioned devices or apparatus to provide advantages in cost and versatility of manufacture. The improved charge carrier mobility of the composition of the present invention enables such devices or apparatus to operate faster and/or more efficiently.

It will be appreciated that compositions of the invention may be formulated differently according to the end use, with different amounts of the composition and/or additional ingredients. Compositions of the present invention may be used in combination with any diluent, for example at least one binder resin and/or another OSC material.

The composition may be used in conjunction with a binder resin to further improve film formation and/or adjust viscosity for improving solution coatability. The binder may also be optionally crosslinked for improved stack integrity of layers. Preferred binders are electrical insulators. Preferred binders include, without limitation, at least one of polyamide, polyurethane, polyether, polyester, epoxy resin, polyketone, polycarbonate, polysulphone, vinyl polymer (for example polyvinylketone and/or polyvinylbutyral), polystyrene, polyacrylamide, copolymers thereof (such as aromatic copolymeric polycarbonate polyesters) and/or compositions thereof. Further suitable binders are disclosed in WO 02/45184.

The definitions of various terms used herein will now be explained.

As used herein, n is the number of repeat units which may be present in a particular polymer or oligomer.

In any of the polymeric or oligomeric formulae given herein, the polymer or oligomer may have any terminal or end capping groups, including hydrogen.

The term "at least one" in the context of "at least one higher molecular weight semiconducting compound" or "at least one lower molecular weight semiconducting compound" should be clearly understood to mean that there may be present two or more higher molecular weight semiconducting compounds and/or two or more lower molecular weight semiconducting compounds in the composition.

Where one or more of the aromatic groups Ar^1 , Ar^2 and Ar^3 in Formulae 1 and 2 are optionally substituted by at least one optionally substituted C_{1-40} hydrocarbyl group, the C_{1-40} hydrocarbyl group preferably is a C_{1-10} hydrocarbyl group, more preferably is a C_{1-4} hydrocarbyl group. Additionally preferably said hydrocarbyl group is an optionally substituted alkyl group. Most preferred for the optionally substituted C_{1-40} hydrocarbyl group is an optionally substituted C_{1-4} alkyl group.

When in the formulae herein there is a list of labels (e.g. Ar^1 , Ar^2 and Ar^3) or indices (e.g. 'n') which are said to represent a list of groups or numerical values, and these are said to be "independent in each case" this indicates each label and/or index can represent any of those groups listed independently from each other, independently within each repeat unit, independently within each Formula and/or independently on each group which

is substituted as appropriate. Thus, in each of these instances, many different groups might be represented by a single label (e.g. Ar¹).

5 The terms 'optional substituent' and/or 'optionally substituted' as used herein (unless followed by a list of other substituents) signifies at least one of the following groups (or substitution by these groups): sulpho, sulphonyl, formyl, amino, imino, nitrilo, mercapto, cyano, nitro, halo, C₁₋₄alkyl, C₁₋₄alkoxy, hydroxy and/or combinations thereof. These optional groups may comprise all chemically possible combinations in the same group and/or a plurality (preferably two) of the aforementioned groups (e.g. amino and sulphonyl if directly attached to each other represent a sulphamoyl radical). Preferred optional substituents comprise: any of C₁₋₄alkyl, methoxy and/or ethoxy (any of these optionally substituted by at least one halo); and/or amino (optionally substituted by at least one methyl and/or ethyl); and/or halo.

10 The term 'hydrocarbyl' as used herein denotes any radical moiety which comprises at least one hydrogen atom and at least one carbon atom. A hydrocarbyl group may however be optionally substituted. Preferably, 'hydrocarbyl' groups comprise at least one of the following carbon containing moieties: alkyl, alkoxy, alkanoyl, carboxy, carbonyl, formyl and/or combinations thereof; optionally in combination with at least one of the following heteroatom containing moieties: oxy, thio, sulphinyl, sulphonyl, amino, imino, nitrilo and/or combinations thereof. More preferred hydrocarbyl groups comprise at least one: alkyl and/or alkoxy (optionally substituted with at least one halo).

15 The term 'alkyl' as used herein may be readily replaced, where appropriate, by terms denoting a different degree of saturation and/or valence e.g. moieties that comprise double bonds, triple bonds, and/or aromatic moieties (e.g. alkenyl, alkynyl and/or aryl) as well as multivalent species attached to two or more substituents (such as alkylene).

20 The term 'halo' as used herein signifies fluoro, chloro, bromo and iodo.

25 Any radical group or moiety mentioned herein (e.g. as a substituent) refers to a monovalent radical unless otherwise stated or the context clearly indicates otherwise (e.g. an alkylene moiety is bivalent and links two other moieties). Unless the context clearly indicates otherwise, a group herein which comprises a chain of three or more atoms signifies a group in which the chain wholly or in part may be linear, branched and/or form a ring (including spiro and/or fused rings).

30 Unless the context clearly indicates otherwise, as used herein plural forms of the terms herein are to be construed as including the singular form and vice versa.

35 Throughout the description and claims of this specification, the words "comprise" and "contain" and variations of the words, for example "comprising" and "comprises", mean "including but not limited to", and are not intended to (and do not) exclude other components.

40 It will be appreciated that variations to the foregoing embodiments of the invention can be made while still falling within the scope of the invention. Each feature disclosed in this specification, unless stated otherwise, may be replaced by alternative features serving

the same, equivalent or similar purpose. Thus, unless stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

All of the features disclosed in this specification may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive. In particular, the preferred features of the invention are applicable to all aspects of the invention and may be used in any combination. Likewise, features described in non-essential combinations may be used separately (not in combination).

It will be appreciated that many of the features described above, particularly of the preferred embodiments, are inventive in their own right and not just as part of an embodiment of the present invention. Independent protection may be sought for these features in addition to or alternative to any invention presently claimed.

The invention will now be described in more detail by reference to the following examples, which are illustrative only and do not limit the scope of the invention.

Determination of the Field Effect Mobility

The field effect mobility of the materials was tested using the techniques described by Holland et al, J. Appl. Phys. Vol.75, p.7954 (1994).

In the following examples the test field effect transistors (FETs) were prepared on pre-patterned Pt/Pd source and drain electrodes on a polyester substrate. The channel length (L) (=distance between the electrodes) was 100 μm and the channel width (W) was 36 mm. The semiconductor composition according to the present invention (mixture of high and low molecular weight compounds) was dissolved one part into 99 parts of solvent, typically toluene, and spin coated onto the substrate at 1000 rpm for 20 s to yield a ~100 nm film. To ensure complete drying the sample was placed in an oven for 20 minutes at 100 °C. A solution of a low permittivity perfluoropolymer, Cytop107M (Asahi Glass, Z-1700E01) was then spin-coated onto the semiconductor giving a thickness typically in the range 0.5 μm to 1 μm . The sample was placed once more in an oven at 100 °C to evaporate solvent from the insulator. A gold gate contact was defined over the device channel area by evaporation through a shadow mask. To determine the capacitance of the insulator layer a number of devices were prepared which consisted of a non-patterned Pt/Pd base layer, an insulator layer prepared in the same way as that on the FET device, and a top electrode of known geometry. The capacitance was measured using a hand-held multimeter, connected to the metal either side of the insulator.

The voltages applied to the transistor are relative to the potential of the source electrode. In the case of a p type gate material, when a negative potential is applied to the gate, positive charge carriers (holes) are accumulated in the semiconductor on the other side of the gate insulator. (For an n channel FET, positive voltages are applied). This is called the accumulation mode. The capacitance/area of the gate insulator C_i determines the amount of the charge thus induced. When a negative potential V_{DS} is

applied to the drain, the accumulated carriers yield a source-drain current I_{DS} which depends primarily on the density of accumulated carriers and, importantly, their mobility in the source-drain channel. Geometric factors such as the drain and source electrode configuration, size and distance also affect the current. Typically a range of gate and drain voltages are scanned during the study of the device. The source-drain current is described by equation 1.

$$I_{DS} = \frac{\mu W C_i}{L} \left((V_G - V_0) V_{DS} - \frac{V_{DS}^2}{2} \right) + I_{\Omega}, \quad \text{eq.1}$$

where V_0 is an offset voltage and I_{Ω} is an ohmic current independent of the gate voltage and is due to the finite conductivity of the material. The other parameters have been described above.

For the electrical measurements the transistor sample was mounted in a sample holder. Microprobe connections were made to the gate, drain and source electrodes using Karl Suss PH100 miniature probe-heads. These were linked to a Hewlett-Packard 4155B parameter analyser. The drain voltage was set initially at -2V and the gate voltage was scanned from +20 to -40 V in 1 V steps, following this V_D was set to -20V and for a second time the gate was scanned from +20V to -40V. When $|V_G| > |V_{DS}|$ the source-drain current varies linearly with V_G . Thus the field effect mobility can be calculated from the gradient (S) of I_{DS} vs. V_G given by equation 2.

$$S = \frac{\mu W C_i V_{DS}}{L} \quad \text{eq. 2}$$

All field effect mobilities quoted below were calculated from this regime (unless stated otherwise).

Example 1

Mixtures 1-6 were made from the high molecular weight and low molecular weight compounds listed in Table 1 (50:50 parts by weight). The mobilities of the resultant mixtures are given, together with the % increase over the single component. The results contained an experimental error of 15%. It can be seen that substantial mobility increases are obtained with the mixtures and in the case of mixtures 3 and 5 the mobility more than doubled. The experiment tested compounds of formula 2A up to molecular weight of about 19000 which all showed the effect of increased mobility.

Table 1

Mixture no.	High mol. wt. compound (mobility, $\text{cm}^2/\text{V.s}$)	Low mol. wt compound (mobility, $\text{cm}^2/\text{V.s}$)	Mobility of mixture	% increase in mobility*
1	Formula 2A, $M_w = 17300$ (4.0×10^{-3})	Formula 2A, $M_w = 542$ (3.2×10^{-4})	6.0×10^{-3}	50
2	Formula 2A, $M_w = 17300$ (4.0×10^{-3})	Formula 1A $M_w = 514$ (3.7×10^{-4})	7.3×10^{-3}	83
3	Formula 2A, $M_w = 17300$ (4.0×10^{-3})	Formula 1J $M_w = 359$ (1.0×10^{-3})	8.8×10^{-3}	120
4	Formula 2A, $M_w = 17300$ (4.0×10^{-3})	Formula 1I $M_w = 389$ (1.0×10^{-3})	7.3×10^{-3}	83
5	Formula 2A, $M_w = 19100$ (3.2×10^{-3})	Formula 1A $M_w = 514$ (3.7×10^{-4})	7.0×10^{-3}	118
6	Formula 2A, $M_w = 10200$ (2.9×10^{-3})	Formula 1A $M_w = 514$ (3.7×10^{-4})	5.3×10^{-3}	83

* compared against mobility of high molecular weight component on its own

Example 2

5 The further Mixtures in Table 2 were made up using the high molecular weight material of Formula 2A $M_w = 17300$ and the various low molecular weight compounds listed (50:50 parts by weight). The % increases in the mobility of the resultant mixtures compared with the mobility of the high molecular weight component on its own are given.

Table 2

Mixture no.	Low molecular weight compound	Percentage Increase from Formula 2A $M_w = 17300$
7	Formula 1B $M_w = 588$	39%
8	Formula 1D $M_w = 516$	37%
9	Formula 1E $M_w = 488$	64%
10	Formula 1F $M_w = 544$	17%
11	Formula 1K $M_w = 361$	60%
12	Formula 1L $M_w = 564$	25%
13	Formula 1M $M_w = 544$	36%

Example 3

Using a compound of formula 1A as the low molecular weight compound, a series of mixtures were made up with high molecular weight compounds of general Formula 2A having progressively increasing molecular weight. The mixtures were 50:50 parts by weight. The results are shown in Figure 1. Mixtures with a compound 2A of mol. wt. = 2000 have impaired mobility compared with the single component. However, at mol. wt. ~4000, the mixtures show an increase in mobility compared with the high molecular weight component on its own. For mol. wt. ~5400 or greater there is a substantial increase in the mobility of the mixture compared with the high molecular weight component on its own.

Examples 4 and 5

The variation of the mobility with mixing ratio of the high and low molecular weight compounds was investigated. A high weight compound of Formula 2A ($M_w = 17300$) was mixed with a low weight compound of formula 1C at various mixing ratios (example 4). The results are shown in Figure 2. The experiment was repeated using a different low molecular weight compound, this time a compound of formula 1J (example 5) and the results are shown in Figure 3. It can be seen that the biggest mobility increases occur when the mixing ratio is in the range 40:60 - 60:40 parts by weight, especially at a ratio of about 50:50.

Comparative Example 1

Mixtures 14 & 15 not in accordance with the present invention were made from the high molecular weight and low molecular weight compounds listed in Table 3 (50:50 parts by weight). The mobilities of the resultant mixtures and the percentage change when compared with the high molecular weight compound on its own are given. The mobilities of the mixtures were found to be lower than the components on their own.

Table 3.

Mixture no.	High mol. wt. compound (mobility, $\text{cm}^2/\text{V.s}$)	Low mol. wt. compound (mobility, $\text{cm}^2/\text{V.s}$)	Mobility of mixture	% change in mobility*
14 Comparative	Formula 2A, $M_w = 2500$ (2.3×10^{-3})	Formula 1A $M_w = 514$ (3.7×10^{-4})	1.1×10^{-3}	-52
15 Comparative	Formula 2B, $M_w = 2100$ (4.1×10^{-3})	Formula 1A $M_w = 514$ (3.7×10^{-4})	2.9×10^{-3}	-30

Example 6

Mixtures 16 & 17 were made from the high molecular weight and low molecular weight compounds listed in Table 4 (50:50 parts by weight). These tests were performed using chlorobenzene as a solvent for the organic semiconductor mixture. The dielectric used was polyisobutylene (Acros cat. No 29916-1000) spun from a solution in hexane. The mobility was determined using a gate potential of up to -60V instead of -40V as the dielectric thickness was greater than in the earlier examples. The mobilities of the resultant mixtures are given, together with the % increase over the single component. It can be seen that substantial mobility increases are obtained with the mixtures.

Table 4

Mixture no.	High mol. wt. compound (mobility, $\text{cm}^2/\text{V.s}$)	Low mol. wt. compound (mobility, $\text{cm}^2/\text{V.s}$)	Mobility of mixture	% increase in mobility*
16	Formula 2C [#] , $M_w = 50,000$ (3.0×10^{-3})	Formula 1J, $M_w = 359$ (1.0×10^{-3})	4.8×10^{-3}	60
17	Formula 2C [#] , $M_w = 50,000$ (3.0×10^{-3})	Formula 1O, $M_w = 345$ (not possible to measure mobility on its own due to crystalline nature of film)	4.4×10^{-3}	47

SMC 60583

19

#Material can be purchased from American Dye Source Inc. (Quebec, Canada) (ADS Ref: ADS 254BE)


Claims

1. A composition for use as an organic semiconducting (OSC) material, the composition comprising:
 - (i) at least one higher molecular weight organic semiconducting compound having a weight average molecular weight (M_w) of at least 3000, and
 - (ii) at least one lower molecular weight organic semiconducting compound having a weight average molecular weight (M_w) of 1000 or less.
2. A composition as claimed in Claim 1 wherein the M_w of the higher molecular weight semiconducting compound is at least 4000.
3. A composition as claimed in Claim 2 wherein the M_w of the higher molecular weight semiconducting compound is at least 5000.
4. A composition as claimed in any one preceding Claim wherein at least one of the higher and lower molecular weight semiconducting compounds has a charge carrier mobility, μ , of at least $10^{-5}\text{cm}^2/\text{V.s.}$
5. A composition as claimed in Claim 4 wherein said charge carrier mobility, μ , is at least $10^{-4}\text{cm}^2/\text{V.s.}$
6. A composition as claimed in Claim 4 or 5 wherein at least the higher molecular weight semiconducting compound has said charge carrier mobility.
7. A composition as claimed in Claim 4 or 5 wherein both the higher and lower molecular weight semiconducting compounds have said charge carrier mobility.
8. A composition as claimed in any one preceding Claim wherein the higher and lower molecular weight semiconducting compounds are present in the composition in the relative proportions 10:90 – 90:10 parts by weight.
9. A composition as claimed in Claim 8 wherein the higher and lower molecular weight semiconducting compounds are present in the composition in the relative proportions 30:70 – 70:30 parts by weight.
10. A composition as claimed in Claim 9 wherein the higher and lower molecular weight semiconducting compounds are present in the composition in the relative proportions 40:60 – 60:40 parts by weight.

11. A composition as claimed in any one preceding Claim wherein the lower molecular weight semiconducting compound comprises either an oligomer having a number of repeat units, n, in the range 2 – 5, or a non-oligomeric molecule where n=1.

12. A composition as claimed in Claim 11 wherein the lower molecular weight semiconducting compound contains one or more of arylamine, fluorene, and/or thiophene groups.

13. A composition as claimed in Claim 12 wherein the lower molecular weight semiconducting compound has a Formula 1:



Formula 1

wherein Ar¹, Ar² and Ar³, which may be the same or different, each represent, independently if in different repeat units, an aromatic group (mononuclear or polynuclear) optionally substituted by at least one optionally substituted C₁₋₄₀ hydrocarbyl group and/or at least one other optional substituent and n = 1 to 4.

14. A composition as claimed in any one preceding Claim wherein the higher molecular weight semiconducting compound comprises a conjugated polymer.

15. A composition as claimed in Claim 14 wherein the higher molecular weight semiconducting compound comprises a polymer being either a homo-polymer or copolymer, including a block-copolymer, containing one or more of arylamine, fluorene, thiophene and/or optionally substituted aryl groups.

16. A composition as claimed in Claim 15 wherein the polymer is a homo-polymer or copolymer, including a block-copolymer, containing arylamine and/or fluorene units.

17. A composition as claimed in Claim 15 wherein the polymer is a homo-polymer or copolymer, including block-copolymer, containing fluorene and/or thiophene units.

18. A composition as claimed in Claim 15 wherein the polymer is an arylamine group containing polymer having a Formula 2 wherein Formula 2 is the same as Formula 1 except that n is at least 5.
- 5 19. A composition as claimed in Claim 18 wherein n is at least 20.
20. A composition as claimed in any one preceding Claim wherein the higher and lower molecular weight semiconducting compounds each contain one or more of the following groups in common: arylamine, fluorene and/or thiophene.
- 10 21. A composition as claimed in Claim 20 comprising at least one compound of Formula 1 where $n = 1$ or 2 as the lower molecular weight compound and at least one compound of Formula 2 where n is at least 20 as the higher molecular weight compound.
- 15 22. A composition as claimed in any one preceding Claim further comprising a binder resin.
- 20 23. Use of the composition as claimed in any one preceding claim in an electronic device.
24. A layer for use in an electronic device, the layer comprising a composition according to any one preceding Claim.
- 25 25. A layer as claimed in Claim 24 wherein the layer is deposited on a part of an electronic device by solution coating.
- 30 26. A layer as claimed in Claim 24 wherein the layer is deposited on a part of an electronic device by one of the following coating or printing techniques : dip coating, roller coating, reverse roll coating, bar coating, spin coating, gravure coating, lithographic coating (including photolithographic processes), ink jet coating (including continuous and drop-on-demand, and fired by piezo or thermal processes), screen coating, spray coating and web coating.
- 35 27. A layer as claimed in any one of Claims 24 to 26 wherein the layer is deposited by first depositing one of the higher and lower molecular weight compounds followed by depositing the other of the higher and lower molecular weight compounds and allowing the higher and lower molecular weight compounds to diffuse into each other to form the composition.
- 40

28. A layer as claimed in any one of Claims 23 to 27 wherein the layer is used as a semiconducting layer in one of the following electronic devices: field effect transistor (FET), organic light emitting diode (OLED), photodetector, chemical detector, photovoltaic cell or capacitor.

5

29. A layer as claimed in any one of Claims 23 to 28 wherein the layer is used as a semiconducting layer in a field effect transistor (FET).

10

30. Use of the composition as claimed in any one of Claims 1 to 22 in an electrophotographic apparatus.

15

31. A composition substantially as herein described with reference to any one of the Examples.


Abstract

5 A composition for use as an organic semiconducting (OSC) material, the composition comprising: (i) at least one higher molecular weight organic semiconducting compound having a weight average molecular weight (M_w) of at least 3000, and (ii) at least one lower molecular weight organic semiconducting compound having a weight average molecular weight (M_w) of 1000 or less. Use of the composition in an electronic device, e.g. FET or OLED.

10

15

20

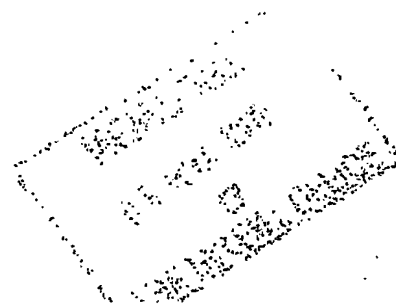

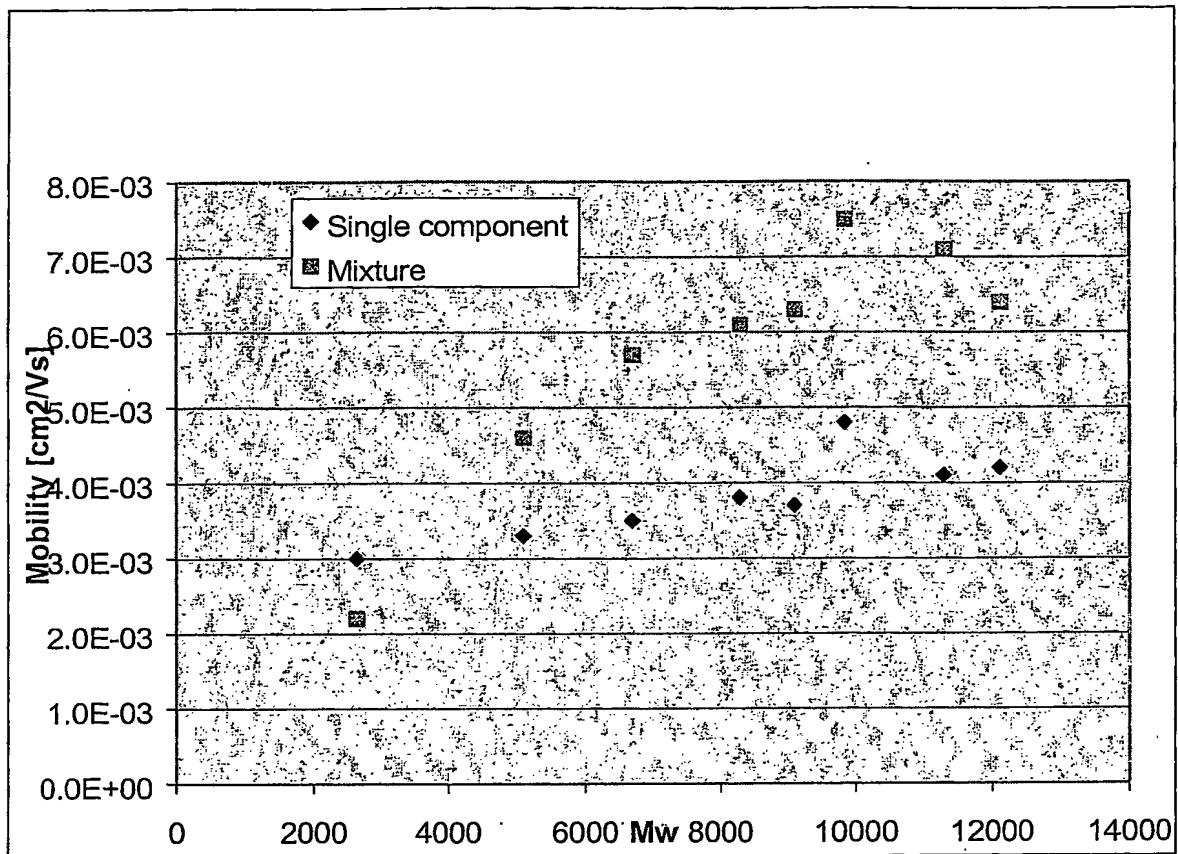


Figure 1

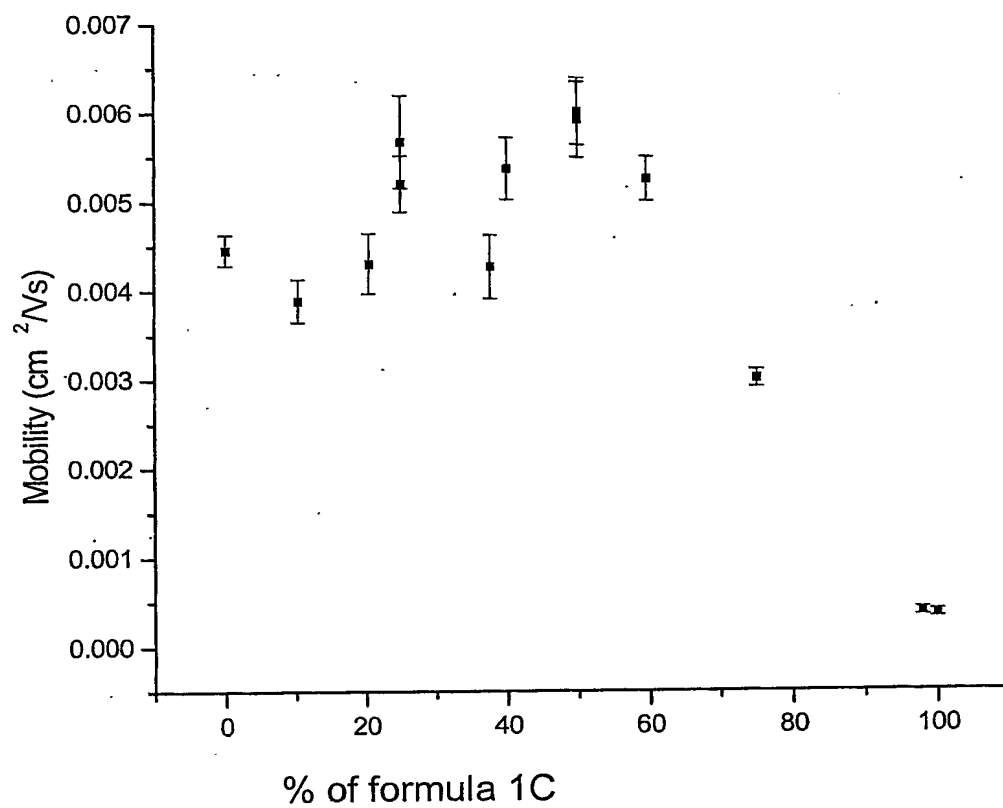


Figure 2

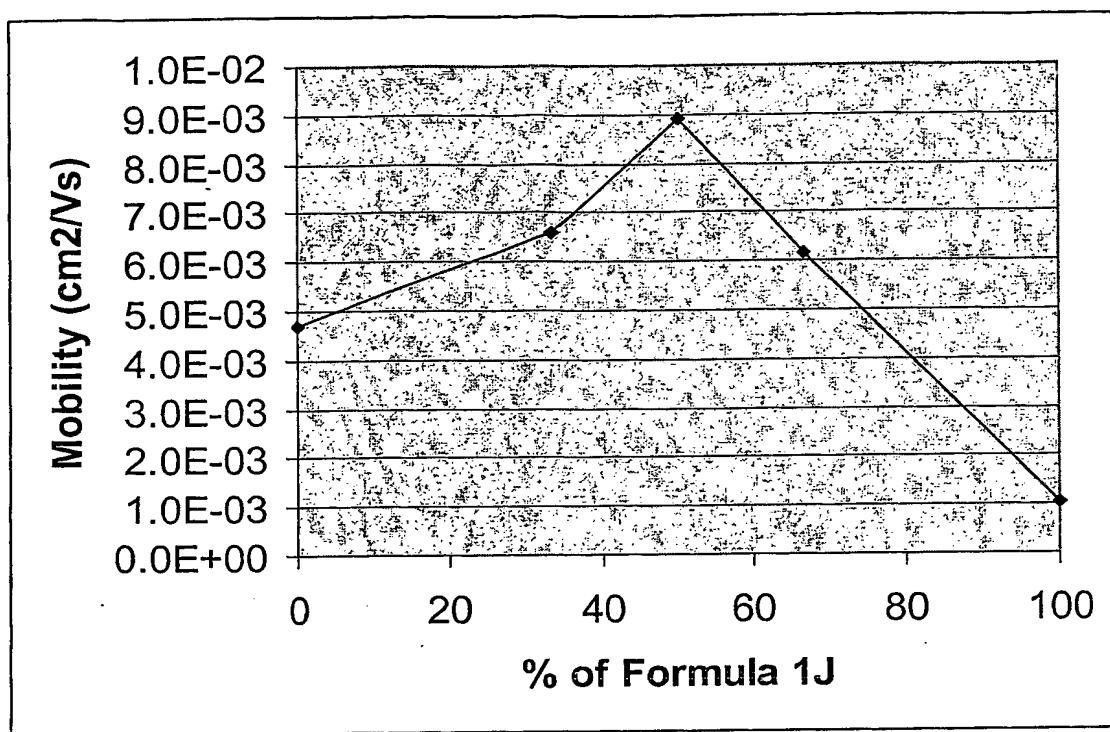


Figure 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.